


## Simple, Reliable and Accurate

- Completely Automatic Operation
- Easy Adjustment and Maintenance
- Quality Approved Materials
- World Wide Support

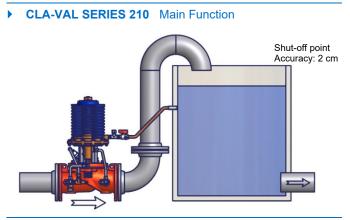

## CLA-VAL 210-01 Typical Application

The CLA-VAL 210-01 is typically designed for closed reservoirs where water is withdrawn through a separate line. The desired water level is set by adjusting the spring force. The pilot control operates on the differential in forces between a spring load and the water level in the reservoir. The CLA-VAL 210-01 is one way flow only.


Recommended typical assembly for CLA-VAL automatic control valves The H-Strainer AQUA 90-501 combined with the "anti-shock" air release & vacuum break valve AQUA 70-516 are added



The CLA-VAL SERIES 210 On/Off Altitude Level Control Valve controls the high water level in a reservoir or closed tank without the need for floats or other devices. It is a non-throttling valve that remains fully open until the shut-off point is reached.

## Make your Valve even Better!

LFS Option?	Control Low flows or night flows
KO Option?	Extend valve life with Anti-Cavitation trim
KG1 Option?	Use stem cleaning for harsh water
Maintenance?	Check on periodic maintenance
Environment?	Adapt to high temperatures or frost risk
Security?	Add hydraulic safety back-up to your valve
Protection?	<u>Remove</u> excessive system overpressures
Corrosion?	Protect your valve with upgraded materials
Not just Products but Solutions: contact CLA-VAL!	

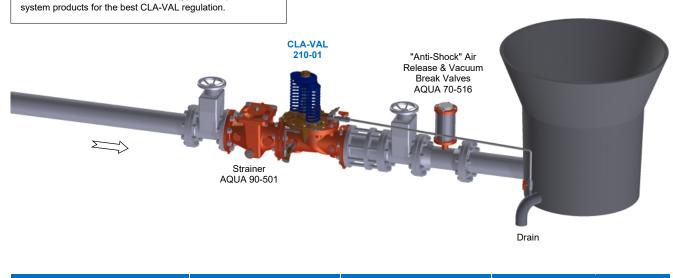

© Copyright CLA-VAL Europe - Specifications subject to change without notice - no contractual illustrations.